··· ALUMINIUM STRIPES SUN LOUVERS AND CLADDINGS ···

LINEAR OPEN FAÇADES - SUN BREAKERS

TECHINICAL CARATHERISTICS OF THE LC 84 FRANGISOLE FOR OUTSIDE

TYPE LC 84



TYPE LS 84
ribbed



TECHNICAL SPECIFICATION

External cladding with linear stripes mm. 84 METALSCREEN type **"LC FRANGISOLE"** sun breaker to obtain a sun louver with inclination degrees 30° or 45° (the inclination 30° or 45° and colour choosed by the consultant).
The stripes are made of prepainted aluminium corrosionproof incombustible class "0" - Euroclass fire reaction A1 width mm. 84 with round angles and thickness of mm. 0,6.
The **"LC FRANGISOLE"** sun breaker will be installed clip-on main supporting carriers installed each mm. 600 between the carriers are made of prepainted aluminium thickness mm. 1,00 and colour white on both sides.

MAIN SUPPORTING RUNNERS

15/45° **15/30°**

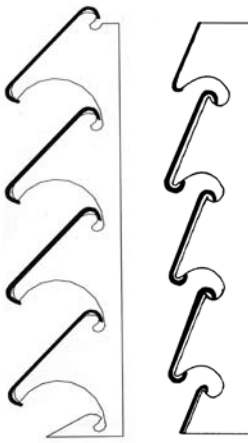

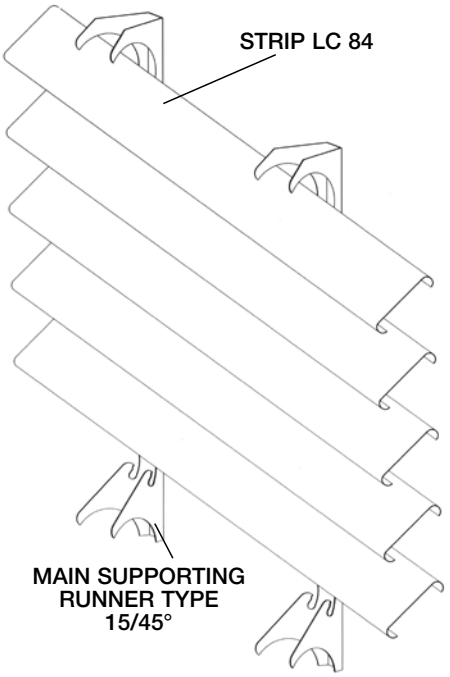

INDICATIVE MATERIAL INCIDENCE PER M²		
Strip Type	LC/45° LS/45°	LC/30° LS/30°
Strips (ml.)	11,54	14,50
Main Carriers (Kg/mq.)	1,40	1,40

TO OBTAIN MORE SOUND ABSORBITION AND NOISE PROTECTION, THE LINEAR STRIPLES AVAILABLE MICROPERFORATED Ø mm. 2

METALSCREEN® S.p.A. - Via Aldo Moro, 38 - 41030 Bomporto (MO) - Italy EU - Tel. +39 059/8170611 - Fax +39 059/8170633
e-mail: metalscreen@metalscreen.it - www.metalscreen.it

All the designs, photos, logo and symbols, messagges and models of this catalogue is own property, of Metalscreen spa Modena - Italy the international laws covers and protects everythings

./8: ; *8/*/)+(";"& ." *""&)/ +*
" 3%+*+/ 9) ;)*+(+"&/ '3 3*/ / .3
"&+ . / '9 "/) .+ %%
?+*(+*"-+/* .+ > / > . ./8:
@ ."&" ." " .+;)"" '(&" . "
&)";)'+*" .+ '399/)&/

: '&"; ' ") %". 39 6)/% < 6/)
9"+*& . " 3%+*+3% < & /* /* /) &$/
'+. ' &:+(=* " %%
: +*(+*"&+/* /6 > /) > /6 &:
'&"; ' +' 8+; * <7 &: .+66) *& (:/+(
/6 &: < ")+*8 &+ '

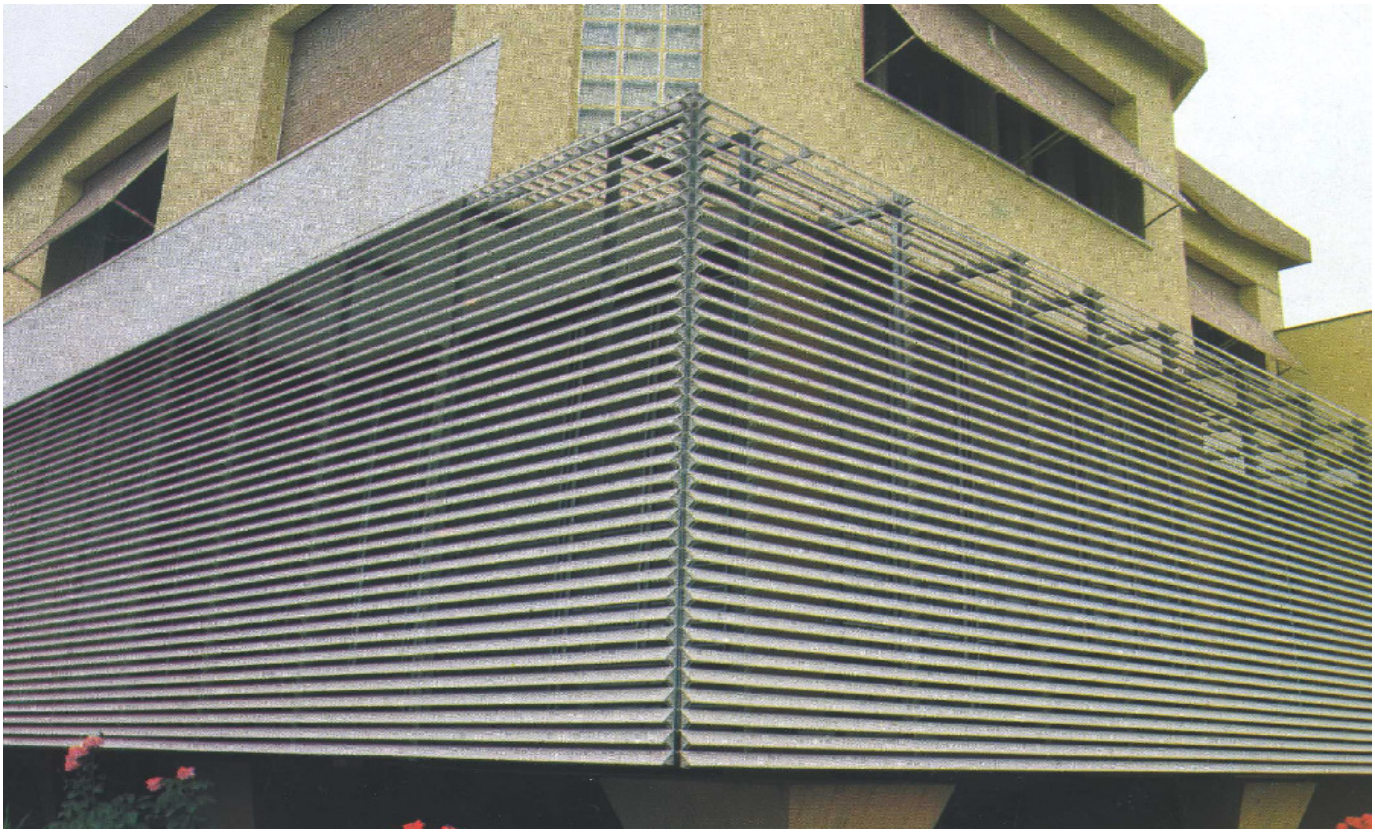

ISO 9001