





TWIN LOCK® METAL SUSPENSIONS T BAR SYSTEMS ANTISEISMIC LOCK FOR EXPOSED LAY-IN CEILINGS

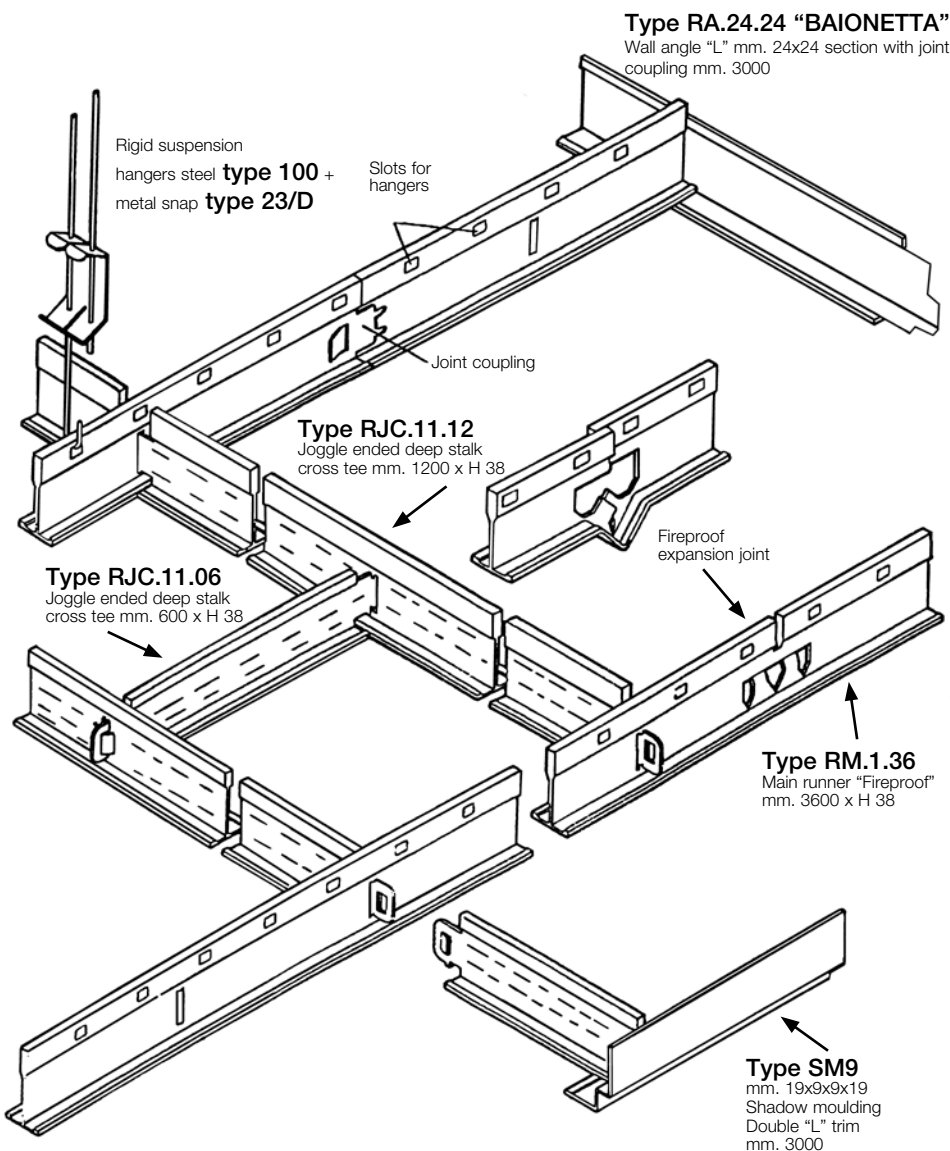


EXPOSED GRID LAY-IN SYSTEMS "ANTISEISMIC LOCK"
STANDARD COLOUR: • **WHITE STANDARD (RAL 9003)**
EXTRA COLOUR: • **Black (RAL 9005)**
 • **Pearl white (RAL 1013)**
 • **Metallic Silver matt (RAL 9006)**
 • **Gold-Silver (mirror finishes)**

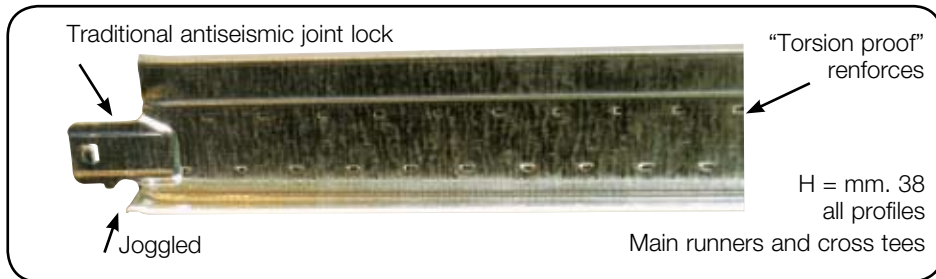

ANGLE TRIM "L" SECTION



RIGIDTRIM®

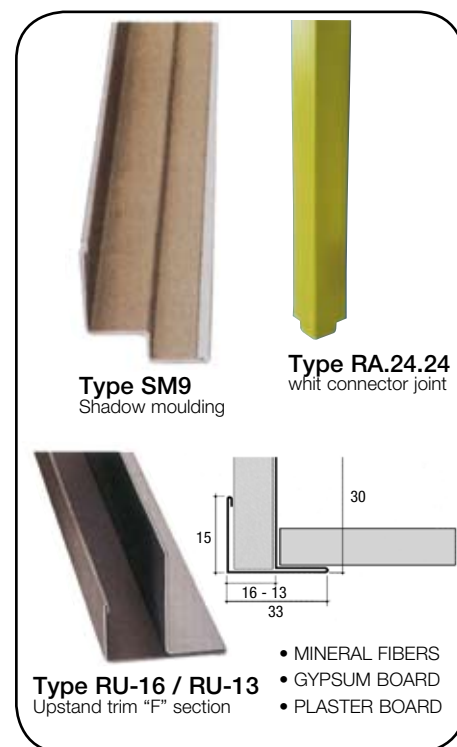


KINDLY ASK OFFER FOR FULL TRUCK OR CONTAINER

TWIN LOCK® METAL SUSPENSIONS T BAR SYSTEMS ANTISEISMIC LOCK FOR EXPOSED LAY-IN CEILINGS





SELECTED STEEL MATERIAL - FIRST CHOICE - TOP QUALITY

Hot-dipped galvanized dry steel for **BODY** and pre-painted ALUMINIUM **CORROSIONPROOF** for **CAP**. Both of these material can meet with either ASTM or CNS standard and CE EN 13964:2004 - CE EN 14195:2005. Good quality of material can make sure the ceiling grid in qualified structure and loading ability when forming the body shape during the production process. Be carefully, make attention to all manufacturers that use the pre-painted galvanized steel for **CAP** that became yellow, change colour in short time and corrosion and dust damage seriously the stability of the grid system **WARNING**. Require the T bar grid system with the **CAP** made of pre-painted ALUMINIUM **CORROSIONPROOF** suitable also for external use and humidity wet place, swimming pools, sauna, steam bath, fitness centers and kitchens.

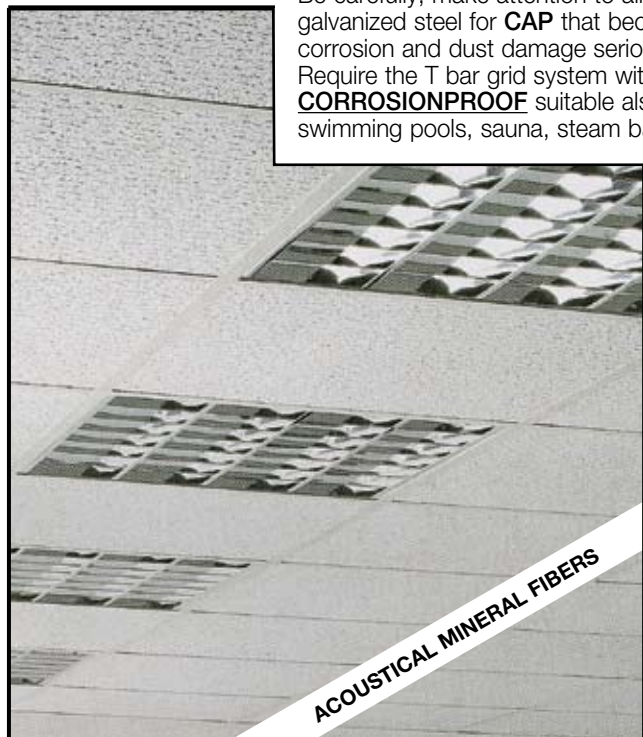

PERIMETRICAL WALL ANGLE "L" SECTION mm. 24x24 WITH CONNECTOR JOINT

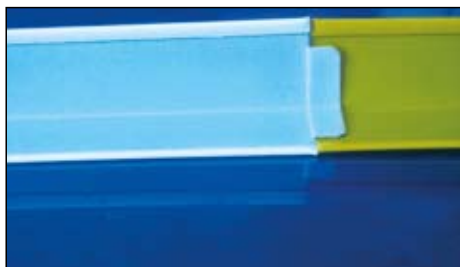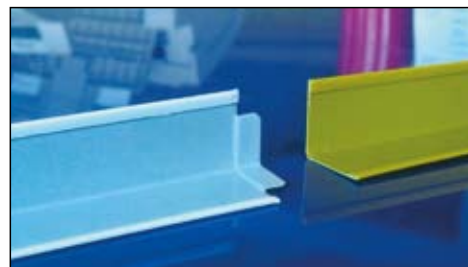

NUOVO
NEW

- FAST INSTALLATION
- PERFECT ALIGNMENT
- AESTETIC BEST RESULT